Locks for fire resistant doors



CERTIFICAZIONE DI PRODOTTO PRODUCT CERTIFICATION

CERTIFICATON'
COMPINCATE N'
D21AWIO
CERTIFICATON'
COMPINCATE N'
D21AWIO
THAS GRAZIARIO SI INSTITU BIORI DI CONTROLLO SI INSTITUTA CENTROLLO SI INSTITUTA CEN

All ISEO panic and emergency exit devices with antibacterial coating AntiGerm have obtained the volountary certification ICIM 021AW/0



In line with its attention to safety, ISEO has decided to add this measure to a device which is always present in public environments and in all those places where hygiene and healthcare is a basic requirement: hospitals, clinics, treatment homes, but also child care centres and nursery schools.

Therefore, the panic function is enriched with the antibacterial protection, AntiGerm\*, whose performance is certified by Padova University Molecular Medicine Department.

The antibacterial treatment action is permanent and does not require special maintenance. The constant release of silver ions ensures top efficiency throughout the product life, even in case of surface scratches.

\*Antibacterical protection for panic exit devices and accessories (except for Stainless steel/PVD finishes).



## **Certifications**





Certifications for fire resistant locks 214\* e 216\* series

EN12209

DIN 1825





Certifications for fire resistant locks 214\* and 212\* series with emergency function, EN 179 standard

EN 179










Code


Multiple package Single package Status



# IDEA Base Infilare for main and secondary leaf







IDEA Base Infilare panic exit device for FIRE RESISTANT doors, FOR MAIN AND SECONDARY LEAF,

**REVERSIBLE**, can be used with panic exit mortice locks and counterlocks with 9 mm handle follower.

Center distance mm 72, with handle follower rotation 30°.

Templates. Assembly instructions.

SQUARE SPINDLE NOT INCLUDED.

CE EN1125 mark and ICIM product certification.

#### Accessories to be ordered separately:

Lock 21411\*65\* - Counterlock 2126\*\*65\* - Counterlock 2127\*\*65\*

Oval bar 9459\* - Striking plate 032094

Microswitch 94100160.

Square spindle 947910 - 947920 - 947930 - Accessories 0321\*4

PVD finish	94C000020379	D	1	-	1	NO
Painted BLACK	94C000050379	D	1	-	1	YES

### **Certifications**





Certifications of the devices according to EN1125 standard

The ICIM certification as per EN 1125 is only valid if the operating bar in this page is used in conjunction with ISEO locks, stricking plates, counterlocks and accessories as indicated in the next page. Whoever uses a certified panic exit device in conjunction with locks, counterlocks, accessories and/or

stricking plates different from the ones specified by ISEO shall be responsible for compliance with EN 1125.

All the updated certificates can be downloaded from our web site: www.iseoserrature.it
















# IDEA Base Infilare for main and secondary leaf

The panic exit device for fire resistant doors with MORTICE LOCK FOR MAIN LEAF is made up of a horizontal bar which operates the locking mechanism through the handle follower. The operation of the bar causes the rotation of the handle follower, unlocks the lock and opens the door. Reversible mechanism for usage on right or left handle doors. All versions can be used with a microswitch that signals door openings.

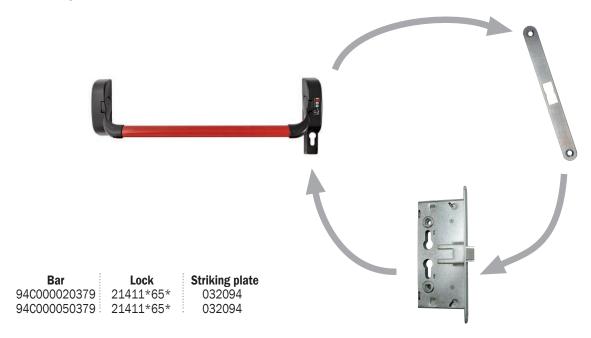

The panic exit device for fire resistant doors with MORTICE COUNTERLOCK FOR SECONDARY LEAF is made up of a horizontal bar which operates the locking mechanism through the handle follower.

The operation of the bar causes the rotation of the handle follower of the counterlock, by which the upper and the lower rod will move inside, the latchbolt of the panic exit lock in the main leaf will be released and both leafs can be opened. Reversible mechanism for usage on right or left handed doors. All versions can be used with a microswitch that signals door openings.

